

APPENDIX 'J'

to the

F.I.A. INTERNATIONAL SPORTING CODE

GENERAL REGULATIONS FOR TOURING AND GRAND TOURING CARS

CHAPTER 1—General Provisions

251—Enforcement of the Regulations

The present regulations define all cars built in large or small series and recognised by the F.I.A. in categories "TOURING" and "GRAND TOURING" in compliance with provisions of Article 254 below.

They compulsorily apply to all events entered on the International Sporting Code (speed events or regularity trials) or on the Calendar of National Events with foreign participation authorised and in which series production cars of the Touring and Grand Touring Categories participate.

252—Categories and groups of vehicles

Vehicles referred to in the above article shall be distributed into the following categories and groups.

A—"TOURING" category:

Group 1—Series Touring Cars

Group 2—Improved Touring Cars

B—"GRAND TOURING" category:

Group 3—Grand Touring Cars

N.B.—Group B takes in also Series Touring Cars with altered bodies as well as Touring Cars belonging to the former Group of "Special Cars."

Events open to cars of the Touring and/or Grand Touring categories may also be open to cars of the "Sports" category. In that case cars of this category, which is not defined in the present Regulations, shall form the:

C—"SPORTS CAR" category:

Group 4—Sports cars

in which shall be admitted all cars complying with the special regulations of Appendix "C" to the International Sporting Code as well as Touring and Grand Touring cars of a model recognised by the F.I.A., but which because of changes effected cannot be entered in one of the three above-mentioned groups (see art. 274).

Promoters are free to choose the group(s) they wish to include in their Supplementary Regulations.

Except when otherwise specified by the F.I.A. for a given category of events, the combination of several consecutive groups is authorised.

Since the order of groups as given here-above is considered as forming a logic progression, a car which is eligible for competing in any group not provided in the Supplementary Regulations of an event is automatically eligible for competing in a higher group.

253—Class Scale

Cars shall be distributed into the following 15 classes, according to their engine cylinder capacity:

- 1) Cars with an engine capacity up to 400 cc.
- 2) Cars with an eng. cap. above 400 cc. and inf. or equal to 500 cc.
- 3) " " " " " " 500 " " " " " " 600 "
- 4) " " " " " " 600 " " " " " " 700 "
- 5) " " " " " " 700 " " " " " " 850 "
- 6) " " " " " " 850 " " " " " " 1000 "
- 7) " " " " " " 1000 " " " " " " 1150 "
- 8) " " " " " " 1150 " " " " " " 1300 "
- 9) " " " " " " 1300 " " " " " " 1600 "
- 10) " " " " " " 1600 " " " " " " 2000 "
- 11) " " " " " " 2000 " " " " " " 2500 "
- 12) " " " " " " 2500 " " " " " " 3000 "
- 13) " " " " " " 3000 " " " " " " 4000 "
- 14) " " " " " " 4000 " " " " " " 5000 "
- 15) Cars with an engine capacity over 5000 cc.

Except when otherwise specified by the F.I.A. for a given category of events, there is no obligation for the promoters to include all the above classes in their Supplementary Regulations and furthermore they remain free to combine two or more consecutive classes according to circumstances particular to their events.

The above classification applies to cars with non-supercharged engines.

Cars equipped with a supercharging device provided for the whole series by the manufacturer may be recognised by the F.I.A., but in one of the classes above the one they would belong to according to their nominal cylinder capacity.

254—Recognition of series production models

Before a series production car is accepted in the "Touring" or "Grand Touring" category in a competition, it has to be recognised in that category by the F.I.A.

Recognition of each Touring or Grand Touring model shall be requested by the National Automobile Club of its manufacturing country. Said request shall be accompanied with a certification from the A.C.N. that the minimum production required has been met and with the technical documentation enabling the unmistakable identification of the model.

Recognitions will be granted by the F.I.A. on recommendations of a sub-Commission appointed by the C.S.I. called "Sub-Commission on Recognitions". This Sub Committee shall be entitled to require any additional evidence it may deem necessary to enable consideration of an application for recognition. They will be circulated at the earliest opportunity by the F.I.A. Secretariat.

Any change definitely brought to the series production of an existing model shall make the subject of a descriptive note giving specifications as to the exact nature of the change effected. Said note shall be established by the A.C.N. of the country where the altered vehicle has been manufactured, and submitted by the A.C.N. to the Sub-Commission on Recognitions.

Should the Sub-Commission deem that the nature of the change effected is appreciably improving the performance of the vehicle, the latter will be considered as a new model and a new recognition form will be prepared.

Otherwise, changes will simply be entered on a complementary form, joined to the existing recognition form, and the altered vehicle will be considered as a "variant" of the original vehicle.

255—Recognition Forms

All Touring and Grand Touring Cars recognised by the F.I.A. will be described on a form, called Recognition Form approved by the National Automobile Club, on which will be entered the chief specifications enabling the identification of each model.

A single type of recognition form drawn up by the C.S.I., shall be used by all A.C.N.s.

All competitors shall have to carry the recognition form concerning their model of car. Promoters will be entitled to refuse participation of a car in their event if said form is not produced at scrutineering. Competitors requiring a recognition form should apply to the A.C.N. of the country in which model concerned is manufactured.

256—Fuel

Fuel shall be of a commercial type generally distributed by road service stations, except in cases of special waivers granted by the A.C.N.s with the consent of the C.S.I. in favour of promoters of events taking place in countries where the quality of commercial fuel is insufficient.

Upper-cylinder or two-stroke engine lubricants are authorised, on condition they do not increase the fuel octane number.

CHAPTER II—Group 1: Series Production Touring Cars

257—Definition

Series production Touring cars are motor vehicles intended for the transportation of persons and for which the manufacturer has endeavoured to obtain the best performance in normal conditions of use.

In order to enjoy recognition in the "Touring" category, these cars must be in conformity with a model well defined in a catalogue and obviously intended for normal use, "for pleasures or business." They must be offered to customers by the regular sales department of their manufacturer.

They must be of a model in current production or which has not been definitely abandoned for over four years. They must have been manufactured in series at a minimum of 1,000 units in 12 consecutive months and be identical as far as mechanism and coach work are concerned.

By identical is meant that the external shape and the component materials of the mechanical parts, the chassis and the body must remain unchanged.

To the exception of the modifications and additions explicitly authorised according to the present regulations any accessory and/or any mechanical part may only be replaced by the same accessory or the same part used by the manufacturer for the considered model, the only tolerances in size being those officially foreseen by the factory.

All elements of the vehicle must compulsorily be those of one same recognised model, whether said model is the basic one or one of its variants also recognised (see art. 254) to the exception of elements whereof the addition, the removal or the replacement is explicitly authorised according to the regulations hereafter.

258—Coachwork

Series production touring cars shall have a closed body or a "convertible" body.

Coachwork means all the external parts of the vehicle licked by the air streams and located above a plane passing through the wheel hubs.

Convertible coachwork means a body which can be either completely closed, or open, with inter alia mobile windows in the doors. Is excluded all coachwork fitted with a simple hood offering but a scanty protection against bad weather, even if the hood is equipped with detachable side-screens.

As a rule the body shall be built by the manufacturer of the chassis. However, a series production body manufactured by a coachwork builder approved by the maker of the chassis may be admitted. For cars whose body has been made outside the main factory, there will have to be at least 1,000 units assembled within a period of 12 consecutive months and said cars will be subject to a separate recognition.

259—Number and dimensions of seats

Series Touring cars shall offer the number of seats provided by the manufacturer. This number shall be at least TWO when the engine cylinder capacity is inferior or equal to *1,000 cc., and at least FOUR when the engine cylinder capacity exceeds *1,000 cc. Shall count as seats only those arranged by the coachwork manufacturer to the effect of accommodating passengers and driver. These seats shall have the following minimum dimensions as indicated on sketch below:

(a) is always measured horizontally and parallel to the longitudinal axis of the chassis, between two vertical planes perpendicular to the longitudinal axis and delimiting from front to rear the open space on a level with the height where such measurement is taken.

For a driver seat (a) is measured at floor level, or at the bottom of any recess, from the perpendicular of the nearest pedal at rest.

For a passenger seat (a) is measured at 20 cm. above floor level or the bottom of recesses if need be.

In the case of movable seats their position shall not be altered when measurements are taken.

(b) is measured vertically from the rear end of (a) to the horizontal plane tangent to the highest part of the cushion, as shown on the sketch.

(c) is measured in the horizontal plane defined above from the upper

*Becomes 700 c.c. at 1st January, 1965.


end of (b), parallel to (a) and in the centre of each seat, as far as the vertical plane perpendicular to the longitudinal axis of the chassis and tangent to the foremost point of the back of the seat.

Backs of seats have a minimum height of 30 cm. measured vertically from the rear end of (c).

The coachwork must be planned in order to obtain:

(a)+(b)+(c)=1.10 m. minimum.

The minimum width for foot space for each person shall be 25 cm. measured perpendicularly to the longitudinal axis of the chassis.

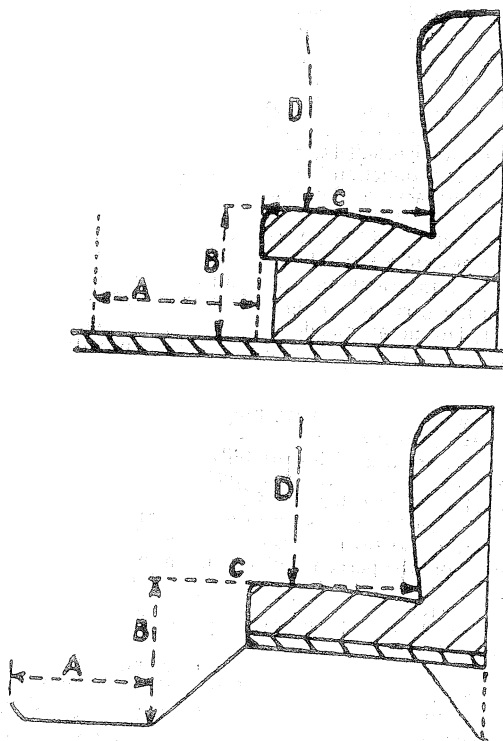

Shall not be recognised as four-seaters, cars comprising inside the coachwork 2 normal seats and a back space fitted for the transport of dogs or luggage, even if the dimensions of said space enable the occasional transport of passengers.

**On the other hand, vehicles equipped with a coachwork of the coupé type, with a cylinder-capacity exceeding 700 cc. and offering only two seats will nevertheless be admitted as series-production Touring cars provided they meet with the following conditions:

**Becomes effective 1st January, 1965.

- (a) with regard to the chassis and mechanical parts they shall be perfectly identical to a series-production recognised four-seater model.
- (b) they shall have at least the same weight.
- (c) at least 1,000 units of the model must have been built in twelve consecutive months.

260—Minimum Weight

The official weight of a car shall be entered on the recognition form of the considered model. This weight shall be obtained by taking the average of the actual weighing results of 5 closed cars of the same model, selected at random and weighed in the following conditions: with the spare wheel provided by the manufacturer and with a tyre which is the same as those mounted on at least two wheels of the vehicle, with full oil tank, and full water tank (if such is the case), but without fuel, tools, luggage or anyone aboard, less a tolerance of 3 per cent.

261—Changes and additions authorised

No modifications and/or additions may be brought to a vehicle as it is supplied by the manufacturer and described on the Recognition Form, whether they affect mechanical parts, material or aspect, internally as well as externally, beside those authorised under the present article.

Any modification and/or addition not explicitly authorised under the present article would entail the assignment of the car to another of the following groups—according to the nature and importance of modifications and/or additions—as defined in the present regulations, or its exclusion from the event, should there not be an applicable group in the supplementary regulations of the competition.

Any change and/or addition not specifically authorised by these regulations shall be drawn attention to in writing by the entrant under pain of exclusion or higher penalty in the case of wilful misrepresentation.

The changes and/or additions authorised are:

(1) **Lighting devices:** make and number are free, provided they comply with the International Convention on Road Traffic.

(2) **Radiators and fuel tanks:** any radiator or fuel tank provided by the manufacturer for the model considered and mentioned in the maintenance booklet and on the recognition form may be used.

The use of radiators having a capacity superior to that of those provided by the manufacturer may be authorised by the A.C.N. in the case of events in special climatic conditions. The addition of a radiator screen whether fixed or mobile, regardless of its system of control, is authorised. The location of all fuel or water pipes is free.

The location and type of filling port for a fuel tank are free even if a change in type and location entails a new aperture in the coachwork. In

the case of a modification the number of ports may nevertheless not be increased and the said port(s) must be exterior and separated from passengers compartment. It will rest with the organisers to forbid the starting of a car that does not quite satisfy them as regards safety under this concern.

Moreover the total capacity of main and extra fuel tanks may in no case exceed the following limits:

cars up to 700 cc. of engine cylinder capacity	60 litres
cars from 701 to 1000 cc. of engine cylinder capacity	70 "
" " 1001 to 1300 cc. " " " "	85 "
" " 1301 to 1600 cc. " " " "	100 "
" " 1601 to 2000 cc. " " " "	110 "
" " 2001 to 2500 cc. " " " "	120 "
" " 2501 to 3000 cc. " " " "	130 "
" " 3001 to 5000 cc. " " " "	140 "
cars over 5000 cc. of engine cylinder capacity	160 "

(3) **Air-filter** : may be changed or removed.

(4) **Carburettors** : the carburettor(s) normally supplied for the recognised model and described on the Recognition Form may not be changed or modified. The jets may however be changed and the hand-control of choke substituted to an automatic one (or vice-versa).

(5) **Battery and generator** : the tension (voltage) of electrical devices may not be changed. The make type and capacity (amperage) of battery and generator are free as well as their attachment system provided the method for driving the generator and the location of battery are unchanged. By location of battery is meant the compartment of the coachwork in which the battery is originally mounted.

The replacement of the dynamo by an alternator is authorised provided the original attachment to the engine is retained.

The location of all electric cables is free.

(6) **Ignition coil, condenser and distributor** : are free, on condition the ignition system remains as provided by the manufacturer for the considered model.

A spare coil and/or a spare condenser may be set up anywhere provided the switching from main to spare cannot be controlled from the inside of the car.

The replacement of an automatic control of the ignition by a hand control (or vice-versa) is authorised. A transistor type of ignition system is not allowed unless it is specified on the form of recognition.

(7) **Plugs** : same number per cylinder as provided by the manufacturer; make and type free.

(8) **Petrol pump** : a mechanically controlled pump may be replaced by an electrically controlled one and vice-versa. The number of petrol pumps simultaneously coupled to the fuel feed system may not be increased.

(9) **Reboring** : is authorised on condition not to exceed the original bore by more than 0.6 mm. Moreover, the resulting increase in capacity must not be such as to make the car pass into a higher capacity.

The make of pistons is free as well as their basic material, but they shall be identical (except for their inner ribs) to those provided by the manufacturer for the model considered and shall have at least the same weight.

In particular, the shape of the crown, the location of the axis, the number and type of rings may not be modified. The type of ring is defined by the function for which it is intended: top ring, compression ring or oil cutter ring.

When the engine has removable sleeves, the replacement of pistons is authorised in the same conditions as provided hereabove, that of the sleeves is also permitted provided the replacement sleeves are identical to the original ones and in particular their basic material is the same. Moreover, engines with removable sleeves shall enjoy the same re-boring tolerance as provided for sleeveless engines.

(10) **Muffler**: the make and type are free, provided the noise-deadening efficiency is not affected and the exhaust manifold and particularly its outlet port is not modified.

(11) **Transmission**: any manually or automatically controlled gearbox and any axle ratio provided and supplied by the manufacturer, mentioned in the maintenance booklet and on the recognition form may be used. The substitution of the clutch pedal by an automatically controlled one, regardless of its system of operation, is authorised.

(12) **Shock absorbers**: the make and type are free but neither their number nor their system of operation, nor their system of attachment, may be modified.

By system of operation is meant: hydraulic or friction shock-absorber, of telescopic or lever-type, regardless of the mechanical resultants of these different systems, such as for instance whether the device has a double-acting or a simple-acting effect, and in case of hydraulic shock-absorbers whether there is or not an additional gas chamber.

(13) **Wheels**: must be of a type provided by the manufacturer and specified on the recognition form. One basic series may comprehend wheels of different types (solid or perforated disc wheels, spoke wheels etc.). Even though the recognition form shows wheels of different dimensions, all four wheels in use must be of the same diameter.

Whenever a spare wheels is provided by the manufacturer, such a spare wheel equipped with a tyre as fitted to one of the other wheels of the car shall be carried in the competition in the position provided by the manufacturer. This spare wheel and tyre shall be carried in the position provided by the manufacturer and shall be securely fastened in that position.

The wheels may be balanced.

(14) **Tyres**: the make and type are free but they must fit without any modification thereof on the original wheels and/or rims without the need of any intermediary device.

(15) **Brakes**: any system improving the cooling or increasing the safety of the braking system is authorised, such as for instance the fitting of special air-pipes (provided the body as defined in Art. 258 is not altered).

The fitting of a dual pump or any type of device providing both a simultaneous action on the four wheels and a divided action on the front and rear wheels is authorised.

The make and attachment system of linings is free, but no other change is authorised: particularly the dimensions of friction surfaces must remain unchanged.

The location of all brake pipes is free.

(16) **Supplementary accessories**: all accessories likely to improve the operation of the vehicle, the comfort of its passengers or the safety are authorised, provided they have no influence whatsoever on the mechanical performance of the engine, the transmissions, the road holding and the braking (except if explicitly authorised in this same article). However no part or accessory normally provided by the manufacturer for the model concerned may be removed or replaced except the steering wheel.

(17) **Coachwork elements**: The only elements of the coachwork which may be changed are as follows: windscreen, door, quarter-light and rear windows, front-seats, steering wheel, shape and length of the gear change lever, and shape and size of control pedals. The only glasses authorised when replacing the windows etc. supplied by the manufacturer are safety glasses to the exclusion of plastic. No other coachwork element may be removed or replaced except as provided by article 18.

(18) **Bumpers, embellishers, stream-lining**: bumpers are compulsory on all cars for which the manufacturer has normally provided them, when they are racing on open road.

For races and hill climbs on closed circuits the Supplementary Regulations may authorise or prescribe the removal of bumpers, failing which said bumpers shall remain.

Wheel embellishers may be removed as may external coachwork embellishers with the exception of those surrounding lamps and the radiator grille and always on condition that no sharp corner or projection become exposed.

The addition of any protective device for the underneath of the car is forbidden unless such a device is mentioned on the recognition form for the model in question or is authorised or made compulsory in the Supplementary Regulations.

CHAPTER III—Group 2: Improved Touring Cars

262—General Specification

All provisions of Chapter II concerning series Touring cars apply likewise to Group 2 cars with the exception of third paragraph of Art. 257 concerning cars whose building has been abandoned since more than four years.

263—Changes and additions authorised

In addition to the 18 latitudes granted for cars of Group 1, the following changes and extra equipment are authorised for cars of Group 2.

Any modification and/or addition not explicitly authorised hereafter shall entail the exclusion of the car from Group 2 and its assignment to another of the following groups provided for in the present regulations, or its exclusion from the event, should there not be an applicable group in the Supplementary Regulations of the competition.

(15) **Brakes**: any system improving the cooling or increasing the safety of the braking system is authorised, such as for instance the fitting of special air-pipes (provided the body as defined in Art. 258 is not altered).

The fitting of a dual pump or any type of device providing both a simultaneous action on the four wheels and a divided action on the front and rear wheels is authorised.

The make and attachment system of linings is free, but no other change is authorised: particularly the dimensions of friction surfaces must remain unchanged.

The location of all brake pipes is free.

(16) **Supplementary accessories**: all accessories likely to improve the operation of the vehicle, the comfort of its passengers or the safety are authorised, provided they have no influence whatsoever on the mechanical performance of the engine, the transmissions, the road holding and the braking (except if explicitly authorised in this same article). However no part or accessory normally provided by the manufacturer for the model concerned may be removed or replaced except the steering wheel.

(17) **Coachwork elements**: The only elements of the coachwork which may be changed are as follows: windscreen, door, quarter-light and rear windows, front-seats, steering wheel, shape and length of the gear change lever, and shape and size of control pedals. The only glasses authorised when replacing the windows etc. supplied by the manufacturer are safety glasses to the exclusion of plastic. No other coachwork element may be removed or replaced except as provided by article 18.

(18) **Bumpers, embellishers, stream-lining**: bumpers are compulsory on all cars for which the manufacturer has normally provided them, when they are racing on open road.

For races and hill climbs on closed circuits the Supplementary Regulations may authorise or prescribe the removal of bumpers, failing which said bumpers shall remain.

Wheel embellishers may be removed as may external coachwork embellishers with the exception of those surrounding lamps and the radiator grille and always on condition that no sharp corner or projection become exposed.

The addition of any protective device for the underneath of the car is forbidden unless such a device is mentioned on the recognition form for the model in question or is authorised or made compulsory in the Supplementary Regulations.

CHAPTER III—Group 2: Improved Touring Cars

262—General Specification

All provisions of Chapter II concerning series Touring cars apply likewise to Group 2 cars with the exception of third paragraph of Art. 257 concerning cars whose building has been abandoned since more than four years.

263—Changes and additions authorised

In addition to the 18 latitudes granted for cars of Group 1, the following changes and extra equipment are authorised for cars of Group 2.

Any modification and/or addition not explicitly authorised hereafter shall entail the exclusion of the car from Group 2 and its assignment to another of the following groups provided for in the present regulations, or its exclusion from the event, should there not be an applicable group in the Supplementary Regulations of the competition.

Any change and/or addition not specifically authorised by these regulations shall be drawn attention to in writing by the entrant on a statement enclosed with his entry form under pain of exclusion or higher penalty in the case of wilful misrepresentation.

(19) **Wheels**: may be of a different type than the one or those provided by the manufacturer provided the hub remains unchanged as well as the dimensions of the rim and of the track provided and stated by the manufacturer.

Wheels, including their attachment system may be reinforced, even if this entails a change in the attachment system, the type of which must nevertheless remain unchanged.

(20) **Reboring**: authorised in the same conditions as for cars of the first group (of Art. 261-8), but with a maximum tolerance of 1.2 mm. (instead of 0.6).

(21) **Stabiliser**: the fitting of a commercial suspension stabiliser or equivalent device is authorised.

(22) **Oil filter or cooler**: an oil filter or cooler may be added when the model provided by the manufacturer has none.

(23) **Carburettor(s)**: The carburettor(s) may be changed by substitution by one of a size different from that specified on the Form of Recognition for the model concerned provided that:

- (a) The make, number of chokes, jets, throttles and all details of design and operational principles remain identical with those of the carburettor(s) specified on the Form of Recognition for the model concerned.
- (b) The carburettor(s) may be fitted using the original attachment bolts or studs and holes and without any intermediary piece.

(24) **Springs of any kind** (valves, clutch, suspension, etc.): They may be replaced by other ones of unrestricted origin, but without modification of the number provided by the manufacturer and on condition they can be fitted without any alteration of the original supports.

(25) **Pistons and Camshaft(s)**: All modifications of pistons are permitted. Their shape may be altered and they may be lightened or replaced by other pistons supplied or not by the manufacturer.

Camshaft(s) may be altered or replaced by other ones supplied or not by the manufacturer, subject to the maximum lift of the valves not exceeding that specified by the manufacturer and stated on the recognition form of the model concerned.

(26) **Finishing off:** all perfecting operations by finishing or machining the original parts but not their replacement except with regard to carburettors, pistons, camshafts, and springs as specified here-above. In other words, provided it is always possible to ascertain unquestionably the origin of the series production part, it may be rectified, balanced, lightened, reduced or modified with regard to the shape through tooling, to the exclusion of any addition of material or any mechanical extension or of any process involving a change of the characteristics of the molecular structure or of the surface of the metal.

The increase of the compression ratio through machining the cylinder head or block, or using a thinner gasket or doing without one, is authorised.

(27) **Braking:** the braking power may be increased subject to the system of operation provided by the manufacturer (drum brakes or disc brakes) being maintained as well as the original supports. By original supports are meant those on which are fixed the mobile parts (drums or discs) and also the attachment system of the elements bearing the friction parts (brake-shoes or pad-linings.)

(28) **Supplementary inside protection:** Any frame or extra-element of reinforcement fitted inside the original coachwork and meant to provide for the driver's safety in case of emergency is allowed on the following conditions:

- (a) it shall in no way interfere with access to the seats and normally occupying them.
- (b) It shall not encroach on the volume occupied by the driver or any of the passengers.
- (c) It shall not, through its construction, reinforce the rigidity of the car structure, that might influence its road-holding qualities.
- (d) The weight of such a structure shall be additional to the recognised weight of the car.

CHAPTER IV—Group 3: Grand Touring Cars

264—Definition

Grand touring cars are vehicles built in small series for customers who are looking for a better performance and/or a maximum comfort and are not particularly concerned about economy.

Such cars shall conform to a model defined in a catalogue and be offered to the customers by the regular Sales Department of the manufacturer. They must be recognised by the F.I.A. according to the provisions of Art. 265 below.

Shall on the other hand also be classed in group 3 (Grand Touring Cars). Touring cars made of series production mechanical parts and not having been subject to any other changes or additions apart from those authorised according to Art. 261 and 263 but equipped with a special coachwork.

By special coachwork is meant:

(a) either the original one when it has been subject to any kind of alteration in shape or appearance (other than one due to a latitude granted under 261 or 263) or to an alteration of the material used by the manufacturer.

(b) or a coachwork without any relation with the original one and made especially either by the manufacturer or an independent builder to answer a private order. In that case, two possibilities are to be examined:

(1) if the chassis is of self-bearing type, it shall be maintained and may be strengthened, but not lightened or cut:

(2) if the chassis is not of self-bearing type, that is when the car has no chassis or only a partial or insufficiently bearing one, the body may be changed as a whole, but shall under its new shape compulsorily use the original attachment points on the series production elements of the suspension, propulsion and steering.

In all the cases mentioned above the resultant coachwork shall present the appearance of being fully finished both externally and internally.

If bumpers are fitted by the manufacturer to the original car as recognised bumpers shall always be fitted in the case of a modification or change of coachwork, except as provided in Art. 261 (18)

Shall also be classified in the same Group 3, Touring Cars equipped with their standard coachwork, but having been subject to changes or additions not authorised by Art. 261 and 263 above and whose limits are stated hereafter under Art. 274 (b).

265—Minimum production—Recognition

In order to enjoy recognition in the "Grand Touring" category cars will have had to be produced at a minimum of one hundred identical units as far as mechanical parts and coachwork are concerned in 12 consecutive months.

The word "identical" has the same meaning as defined under Art. 257, par. 4. However, one same minimum series of 100 units may have two different carburettor equipments either in number or size.

Moreover, cars will have to conform to specifications of Art. 266-270 below.

266—Ground clearance

When the vehicle is equipped with the wheels and tyres to be used in the competition and with fuel, oil and water reservoirs filled ready for the start of the competition and with the driver aboard it shall be able under its own power to pass over a template 80 × 80 cm. and 10 cm. high.

267—Lock

The maximum lock shall be 6.75 m., which means that the car must be able to make a complete turn in any direction without the wheels going beyond two parallel lines 13.50 m. apart, drawn on the ground.

268—Starting

Grand Touring cars shall have to be equipped with a starting device liable of being operated by the driver when aboard.

269—Fuel tanks

Grand Touring cars shall have one of the fuel tanks provided by the manufacturer and the capacities of said tanks shall be entered on the recognition form.

However, the total capacity of the fuel tanks (main and auxiliaries, if such is the case) shall not exceed the maxima specified by Art.269.

270—Coachwork—Minimum width—Number of seats

Grand Touring series cars shall be equipped with a coachwork enabling a normal touring use, in particular as concerns comfort, habitability and protection against bad weather.

Coachwork shall be completely finished without any provisional part. It shall offer at least two seats located on either side of the longitudinal axis of the car at the same level without prejudicing the normal system of adapting the seat to the size of the pilot.

The minimum inside width shall be 100 cm. for cars with an engine cylinder capacity of 1000 cc. or less, and 110 cm. for cars of a higher capacity.

This width, measured perpendicularly to the longitudinal axis of the car must be respected along a minimum height of 25 cm. and a minimum depth of 30 cm. measured on the vertical plane tangent to the back of the steering wheel and the back of the seat (i.e. at the normal place where the driver needs elbow-room).

The passenger's space shall remain available through the whole event. It shall not be either totally or partly covered and shall offer the same conditions of comfort, habitability and protection as that of the driver. However, supplementary regulations may provide for the covering of the passenger's seat with canvas or any other similar supple material, which can be quickly removed by hand without any tool. Under no condition whatever may the seat be used for a spare wheel or be combined with the fuel tank(s). The latter shall be located outside the cabin so as to protect its occupant from fumes and direct fuel splashing.

Transmission equipment (shafts and cardan joints) shall be placed under the floor boards or in tubes or casings. Floor boards, tubes and casings shall be permanent fixtures, properly joined together and firmly fixed to the coachwork or the chassis.

As concerns the location of the seats in relation to the pedals it shall answer the minimum specifications of Art. 259 for Touring cars. The height under the roof or hood measured in the middle of the driver's seat from the lowest part of the cushion shall be 85 cm. minimum.

Windshield—Windshield-wiper—Protected height

The windshield is compulsory. It shall be placed symmetrically in relation to the axis of the car and be equipped with at least one automatic wiper placed before the driver and wiping a sufficient surface to enable the driver to see distinctly the road from his seat.

For cars with open or convertible coachwork the windscreen shall have the following minimum dimensions:

Width (chord measurement):

90 cm. for cars with an engine capacity inferior or equal to 1000 cc.

100 cm. for cars with an engine capacity exceeding 1000 cc.

Height:

25 cm. measured vertically and carried through the whole minimum width.

Furthermore, the distance between the top edge of the windshield and the lower point of the front-seat cushions shall be 80 cm. minimum, measured vertically at all points of the minimum width.

Mudguards

Mudguards shall be of permanent nature and firmly fixed.

They shall be placed exactly above the wheels and provide efficient covering of at least one-third of their circumference.

The width of the mudguards shall be such that no part of the tyre will pass beyond its edge when the wheels are not steered.

In those cars where mudguards are entirely or partly overhung by the body structure, the combination mudguards-body or the body alone shall nevertheless meet the above protection requirements.

The back extremities of the front and rear mudguards shall come down at least to the horizontal plane passing through the centre of the wheel hub cap.

Mudguards turning with the wheels are prohibited. They must be solid with the body, there being no gap between them.

Hoods

Open or convertible cars shall be equipped with a hood fitting hermetically the windshield, the windows or the side panels and the back of the coachwork.

The hood shall never interfere with the opening of the doors.

Its back panel shall be entirely closed and shall offer a transparent section, providing good visibility behind, of the following minimum dimensions; width, 50 cm.; height, 10 cm.—measured vertically.

It may be used partially or permanently during the event, according to the provisions of the Supplementary Regulations.

The hood may be replaced by a removable hard top, but at scrutineering cars must be presented with one or other.

Doors

All vehicles shall be fitted with at least one rigid door on each side with lock and hinges, giving direct access to seats. When open it shall liberate a space allowing for the frontal passage of a 50 × 30 cm. rectangle.

Vehicles with a front or rear door may have only one door.

Cars with closed or convertible coachwork shall have doors equipped with security glass or transparent rigid plastic material, providing ventilation, each window having a minimum width of 40 cm. and a minimum height of 25 cm.

Rear window

It shall let the light through a minimum width of 50 cm. and a minimum height (for the whole minimum width) of 10 cm. vertically measured.

Luggage trunk

A covered space being an integral part of the coachwork but outside of the space occupied by the front seats, large enough to receive a trunk of 65 × 40 × 20 cm. minimum, besides the spare wheel, tools or the folded hood, shall be provided.

271—Special bodies

Open or closed special bodies built in supplement to those required for the recognition of the car according to Art. 265 above shall be admitted if they meet the specification of Art. 264 (a) and (b) and Art. 270 above, provided the weight of the vehicle at least equal to that of the corresponding recognised car.

Once there is an existing series of 100 units built within twelve consecutive months, offering the standard body and duly recognised, no minimum of construction is further required for a special body whether mounted by the manufacturer or by the entrant.

272—Minimum weight

The weight of a Grand Touring car shall be entered on the recognition form of the model under consideration. It shall be obtained in the conditions specified under 260.

When the weight is being checked, a tolerance of 5% less than the weight entered on the recognition form will be granted.

273—Modifications authorised

All additional equipment and modifications authorised for series production Touring cars (group 1) and Improved Touring cars (group 2) are authorised for Grand Touring cars (group 3), in particular all those listed in Art. 261 and 263.

Any Grand Touring car with extra equipment or subject to any modification not explicitly authorised may take part in a competition only in group 4, as defined hereafter at Art. 275, and subject to said group being provided in the Supplementary Regulations.

However, all open cars when competing in a speed race shall compulsorily be fitted with a "roll bar" adequate for the protection of the driver in the event of the car overturning.

N.B.—Any alteration or addition not explicitly authorised here-above will entail the vehicle ineligible in group 3 and will entail its assignment to group 4 (see Art. 275 hereafter).

Any change or addition not listed above and which has not been subject to a previous written statement of the entrant will entail a penalty which may go as far as exclusion from the competition without prejudice to higher penalties in case of wilful misrepresentation.

274—Touring cars assimilated to "Grand Touring"**(a) Touring Cars with Special Coachwork**

Touring cars of a model recognised by the F.I.A. equipped with special coachwork, as defined in Art. 270 above, but in conformity with regard to mechanism with the series production model, except for changes and additions authorised according to Arts. 261 and 263, shall be assimilated to Grand Touring cars and may participate in events in group 3.

If the above cars are subject to changes and additions exceeding the limits provided under Arts. 261 and 263, they shall pass into group 4, and will then be subject to no further obligation apart from having to comply with the requirements of Appendix C to the International Sporting Code.

(b) **Touring Cars with Standard Coachwork and Special Mechanical Parts (previously called Special Touring Cars)**

Shall also be assimilated to Grand Touring cars, Touring cars of an F.I.A. recognised model equipped with their original coachwork but which have been subject to alterations and additions other than those authorised according to Arts. 261 and 263, and made either by the manufacturer or the competitor with the intention of increasing the performance and improving the conditions of use of the vehicle.

These alterations or additions may effect the mechanical parts of the engine, transmission, steering, suspension, the number of the carburettors, the inlet and exhaust system, the braking system.

The reboring of the engine, whether sleeveless or fitted with sleeves, is authorised up to the limit of the class to which belongs the car according to its original cylinder capacity. Furthermore, in consideration of the trend of technical evolution, and the necessity of increasing the safety of cars whose high performances had not been initially foreseen by the manufacturer, the improvement of the braking may be sought without any obligation of maintaining the original system; drum brakes may therefore be replaced by disc brakes.

However, the fundamental and general design of the car, of the engine and other mechanical parts must remain the same as those of the corresponding series production car. The standard coachwork must not be modified, the chassis may be reinforced but not lightened or cut. The track and wheelbase must remain unchanged. The suspension and rear axle must remain of same type. All casings and blocks housing the mechanical parts must remain unchanged, except for the following:

(1) Cylinder head.

(2) Oil sump.

(3) Braking system.

(4) Gearbox and rear axle box, which may be subject to minor alterations to enable the modification of the gear box ratios or the mounting of an overdrive.

The minimum weight must be that entered on the recognition form of the corresponding series production touring car, but the tolerance granted when the weight is checked will be minus 10% (instead of minus 5%).

The addition of compressors, blowers or any kind of supercharging device not provided in the series production and entered on the recognition form remains prohibited on cars of this group.

All changes or additions not authorised under Arts. 261 and 263 shall make the object of a written statement from the competitor to be appended to the entry form and sent to the promoters.

N.B.—Any omission or wrong information on the above-mentioned statement will entail a sanction which may go as far as excluding the car from the competition without prejudice to higher penalties in case of wilful misrepresentation.

Luggage trunk

A covered space being an integral part of the coachwork but outside of the space occupied by the front seats, large enough to receive a trunk of 65 × 40 × 20 cm. minimum, besides the spare wheel, tools or the folded hood, shall be provided.

271—Special bodies

Open or closed special bodies built in supplement to those required for the recognition of the car according to Art. 265 above shall be admitted if they meet the specification of Art. 264 (a) and (b) and Art. 270 above, provided the weight of the vehicle at least equal to that of the corresponding recognised car.

Once there is an existing series of 100 units built within twelve consecutive months, offering the standard body and duly recognised, no minimum of construction is further required for a special body whether mounted by the manufacturer or by the entrant.

272—Minimum weight

The weight of a Grand Touring car shall be entered on the recognition form of the model under consideration. It shall be obtained in the conditions specified under 260.

When the weight is being checked, a tolerance of 5% less than the weight entered on the recognition form will be granted.

273—Modifications authorised

All additional equipment and modifications authorised for series production Touring cars (group 1) and Improved Touring cars (group 2) are authorised for Grand Touring cars (group 3), in particular all those listed in Art. 261 and 263.

Any Grand Touring car with extra equipment or subject to any modification not explicitly authorised may take part in a competition only in group 4, as defined hereafter at Art. 275, and subject to said group being provided in the Supplementary Regulations.

However, all open cars when competing in a speed race shall compulsorily be fitted with a "roll bar" adequate for the protection of the driver in the event of the car overturning.

N.B.—Any alteration or addition not explicitly authorised here-above will entail the vehicle ineligible in group 3 and will entail its assignment to group 4 (see Art. 275 hereafter).

Any change or addition not listed above and which has not been subject to a previous written statement of the entrant will entail a penalty which may go as far as exclusion from the competition without prejudice to higher penalties in case of wilful misrepresentation.

274—Touring cars assimilated to "Grand Touring"**(a) Touring Cars with Special Coachwork**

Touring cars of a model recognised by the F.I.A. equipped with special coachwork, as defined in Art. 270 above, but in conformity with regard to mechanism with the series production model, except for changes and additions authorised according to Arts. 261 and 263, shall be assimilated to Grand Touring cars and may participate in events in group 3.

If the above cars are subject to changes and additions exceeding the limits provided under Arts. 261 and 263, they shall pass into group 4, and will then be subject to no further obligation apart from having to comply with the requirements of Appendix C to the International Sporting Code.

(b) **Touring Cars with Standard Coachwork and Special Mechanical Parts (previously called Special Touring Cars)**

Shall also be assimilated to Grand Touring cars, Touring cars of an F.I.A. recognised model equipped with their original coachwork but which have been subject to alterations and additions other than those authorised according to Arts. 261 and 263, and made either by the manufacturer or the competitor with the intention of increasing the performance and improving the conditions of use of the vehicle.

These alterations or additions may effect the mechanical parts of the engine, transmission, steering, suspension, the number of the carburettors, the inlet and exhaust system, the braking system.

The reboring of the engine, whether sleeveless or fitted with sleeves, is authorised up to the limit of the class to which belongs the car according to its original cylinder capacity. Furthermore, in consideration of the trend of technical evolution, and the necessity of increasing the safety of cars whose high performances had not been initially foreseen by the manufacturer, the improvement of the braking may be sought without any obligation of maintaining the original system; drum brakes may therefore be replaced by disc brakes.

However, the fundamental and general design of the car, of the engine and other mechanical parts must remain the same as those of the corresponding series production car. The standard coachwork must not be modified, the chassis may be reinforced but not lightened or cut. The track and wheelbase must remain unchanged. The suspension and rear axle must remain of same type. All casings and blocks housing the mechanical parts must remain unchanged, except for the following:

(1) Cylinder head.

(2) Oil sump.

(3) Braking system.

(4) Gearbox and rear axle box, which may be subject to minor alterations to enable the modification of the gear box ratios or the mounting of an overdrive.

The minimum weight must be that entered on the recognition form of the corresponding series production touring car, but the tolerance granted when the weight is checked will be minus 10% (instead of minus 5%).

The addition of compressors, blowers or any kind of supercharging device not provided in the series production and entered on the recognition form remains prohibited on cars of this group.

All changes or additions not authorised under Arts. 261 and 263 shall make the object of a written statement from the competitor to be appended to the entry form and sent to the promoters.

N.B.—Any omission or wrong information on the above-mentioned statement will entail a sanction which may go as far as excluding the car from the competition without prejudice to higher penalties in case of wilful misrepresentation.

CHAPTER V—Cars not complying with the above provisions**275—Group 4—Sports Cars**

If the promoters of the events wish to accept the entry of other cars than those which are complying with the here-above mentioned specifications for groups 1, 2 and 3, they may contemplate a fourth group which will include:

(1) All Touring and Grand Touring cars of a model recognised by the F.I.A., but not complying with the specifications required for classification in one of the groups from 1 to 3. In that case they must comply with the provisions of Art. 266 to 270.

Cars deriving from a model recognised in the Touring category but assimilated to sports cars on account of alterations exceeding the limits consistent with classification in one of the three preceding groups are not, however, when they compete in regularity trials subject to the specifications of Art. 266 (minimum ground clearance) or of Art. 267 (maximum lock).

(2) All cars which are not of a recognised model but which comply with the specifications of Appendix "C" to the International Sporting Code.

276—Cars belonging to none of the above categories or groups

Promoters are free to allow participation in an event of cars of any type and which do not correspond to any of the above categories or groups such as, for instance: military cars, buses, lorries, experimental cars in conformity neither with Appendix "C" nor Appendix "J", etc.

They shall, however, not allow such cars to compete in any one of the four groups listed under Art. 252.

A new Appendix J, being completed at the time of going to press, is to be brought into effect in 1966.